







#### R&D

We persistently aim to elevate our designs, enhancing their efficiency and accuracy to deliver top-notch end products. To support this, we've established a specialized research and development center in Hyderabad. This advanced facility boasts state-of-the-art machinery, catering to multiple processes to ensure the superior systems. Our products undergo thorough design and testing but surpass all quality standards essential for building requirements.

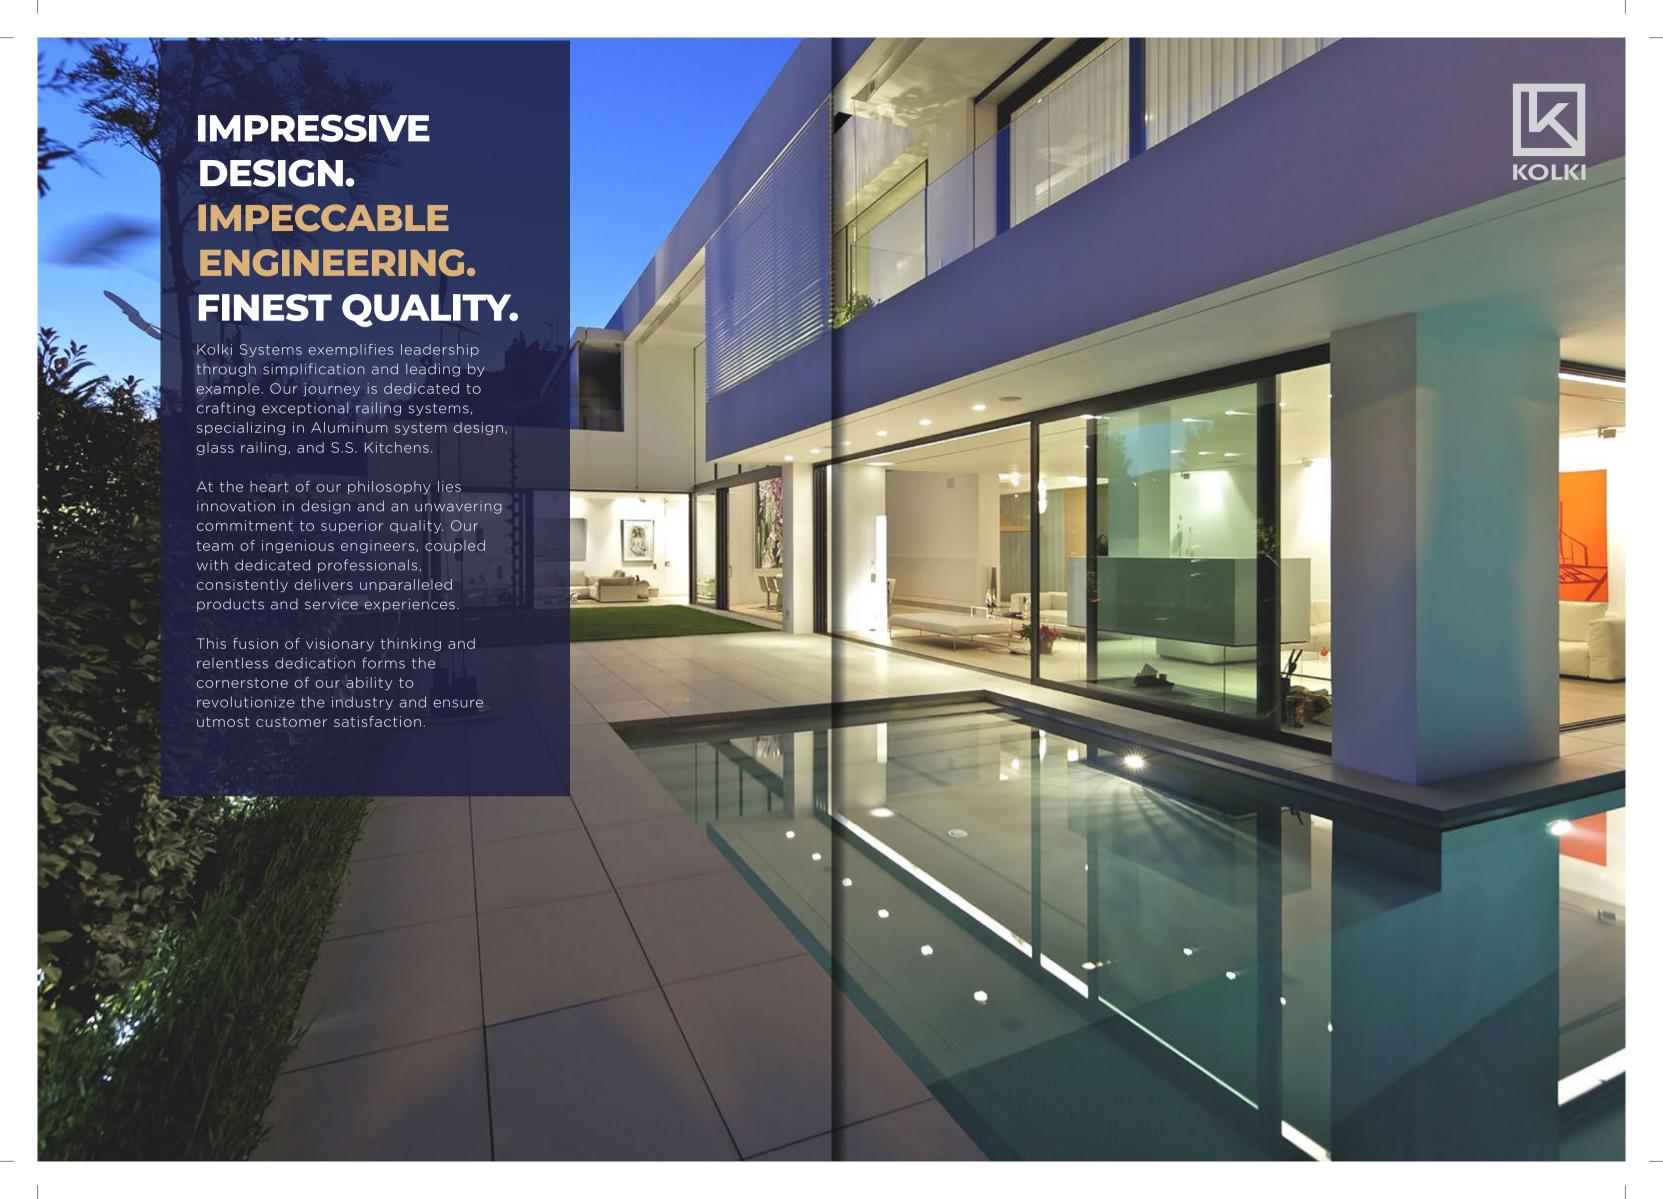





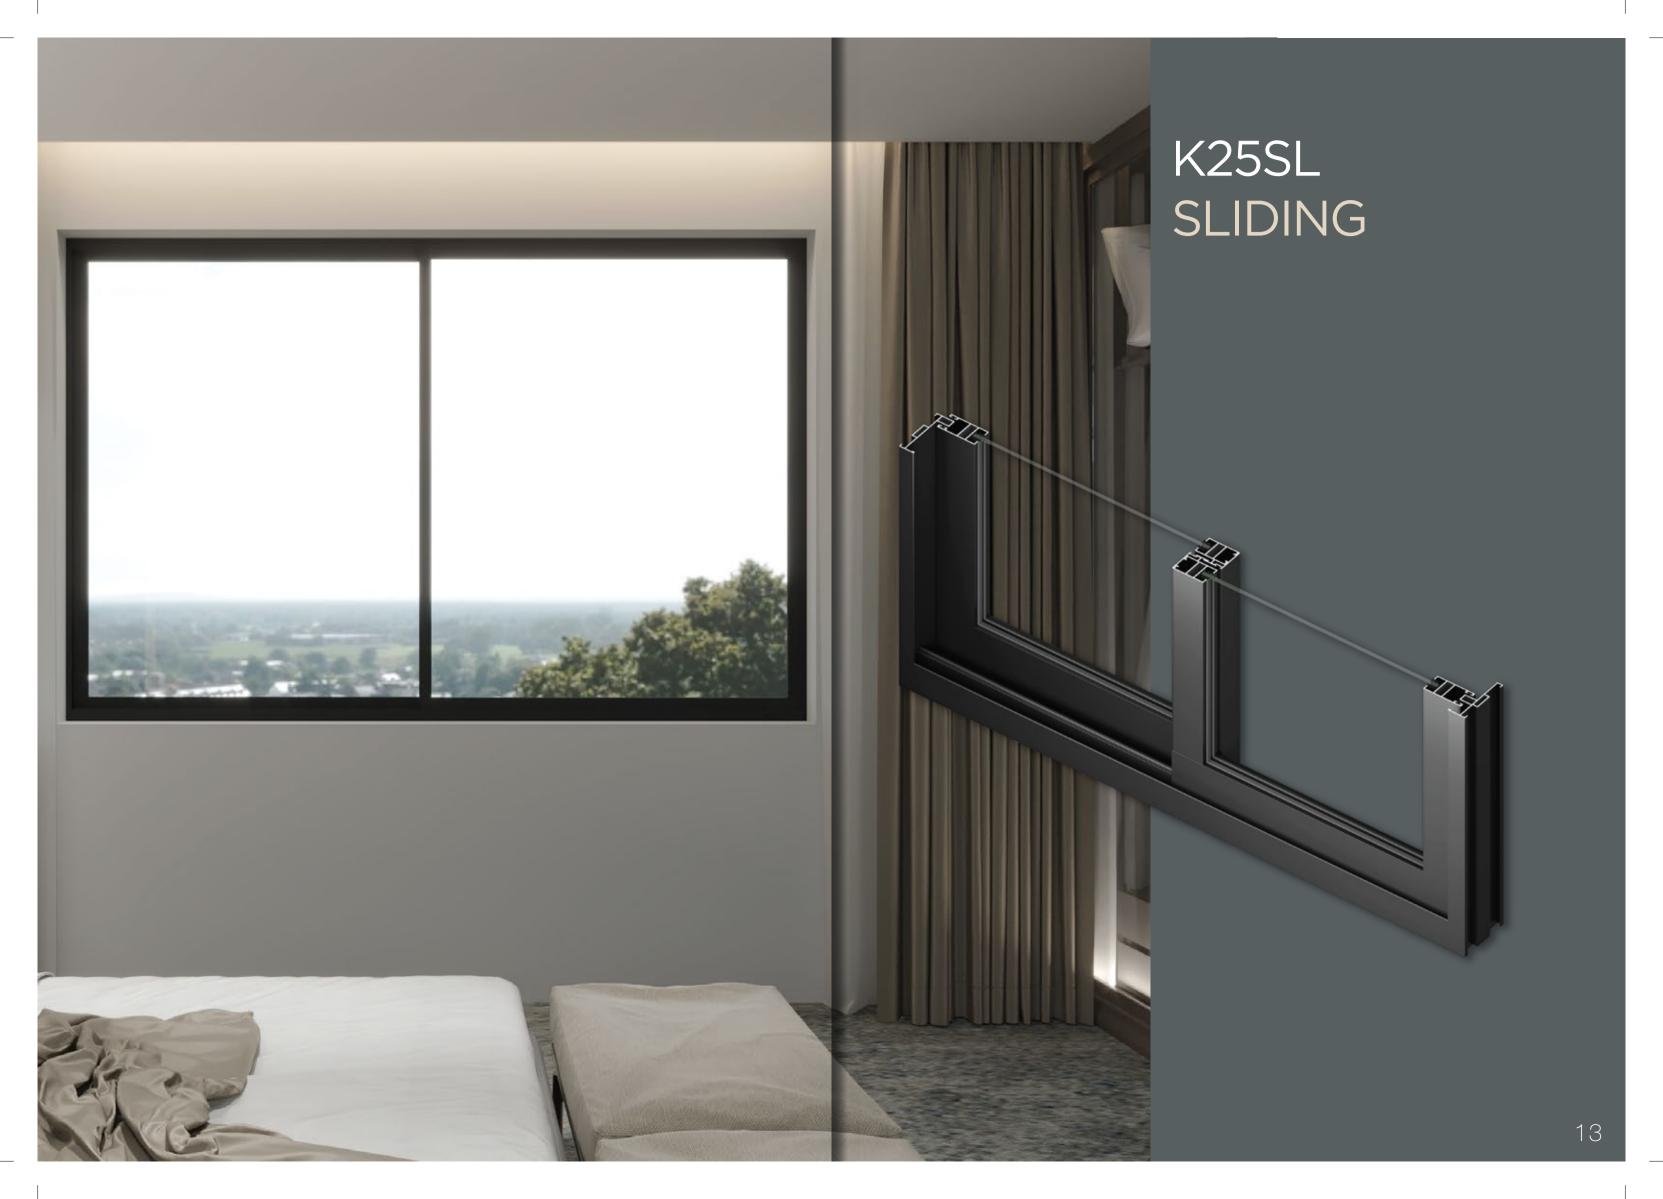

# **K25SL SLIDING**






K25SL on the floor



K25SL Conceal from Inside

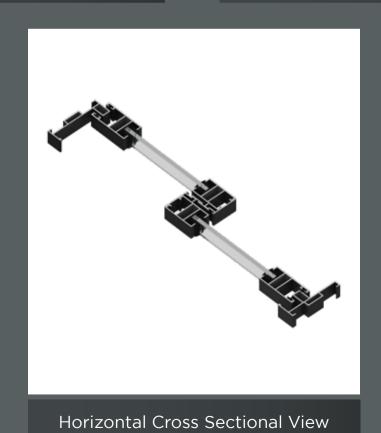

System Specification

Profile Alloy 6063
Glass Thickness 5, 6, 8
Max Shutter Height\* 2400
Max Shutter Weight 100kg
Multi Locking Yes


Mosquito Mesh Solution Fiber / SS Mesh


Hidden Bottom No
Corner Opening No


Roller Rail Aluminium


#### **Section Detail**

Frame Height 40
Frame Width 2 Track 65
Frame Width 3 Track 100
Interlock Sightline 40
Center Opening Profile Width 102.5
















# K30SL SLIDING

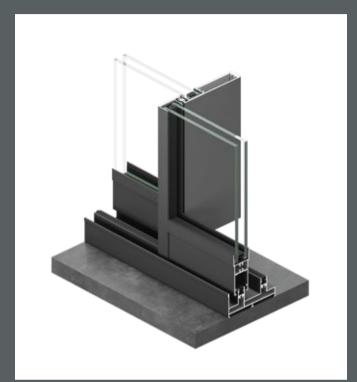

K30SL on the floor

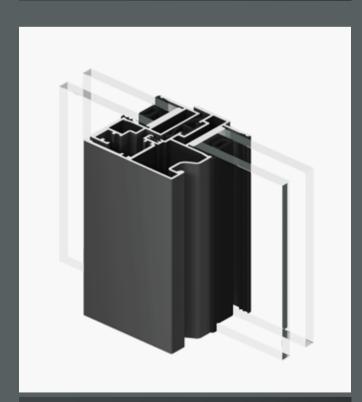

K30SL Central Opening

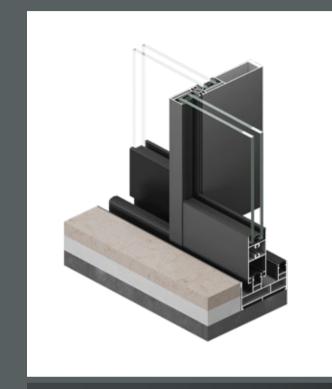

K30SL Conceal from Inside



Horizontal Cross Sectional View

# KOLKI

#### System Specification

Profile Alloy 6063 Glass Thickness 5, 6, 8, 10, 23, 24

Max Shutter Height\*2700Max Shutter Weight160kgMulti LockingYes

Mosquito Mesh Solution Fiber / SS Mesh


Hidden Bottom No Corner Opening No


Roller Rail Aluminium


Integrated Railing Yes


#### Section Detail

Frame Height	40
Frame Width 2 Track	93
Frame Width 3 Track	137
Interlock Sightline	20
Center Opening Profile Width	61















# K39SL SLIDING

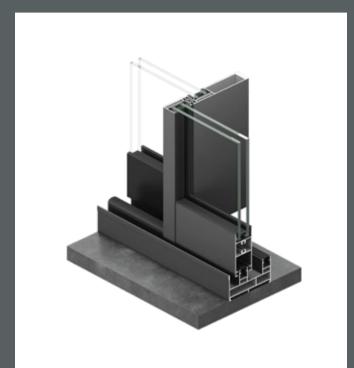


K39SL on the floor

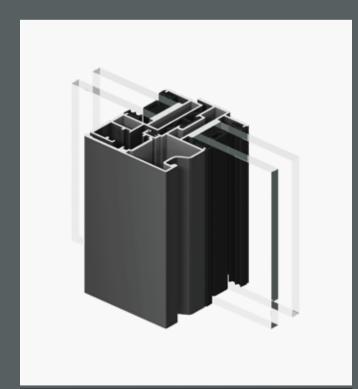

K39SL Central Opening



K39SL Conceal from Inside

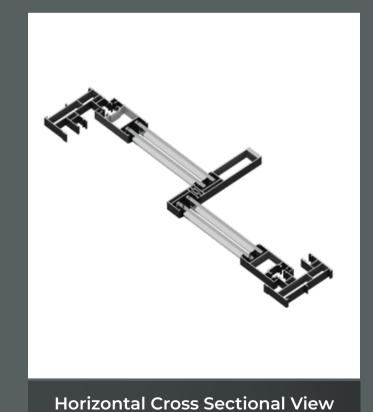

## System Specification

Profile Alloy 6063

Glass Thickness 6, 8, 10, 11.52, 12, 13.52, 24, 26, 28

Max Shutter Height\*3600Max Shutter Weight300kgMulti LockingYes

Mosquito Mesh Solution Fiber / SS & Security Mesh


Hidden Bottom No Corner Opening Yes


Roller Rail Stainless Steel


Integrated Railing Yes


#### **Section Detail**

Frame Height	47
Frame Width 2 Track	91
Frame Width 3 Track	140
Interlock Sightline	26
Center Opening Profile Width	63











K30M minimal IIIIIII 29



# K30M MINIMAL

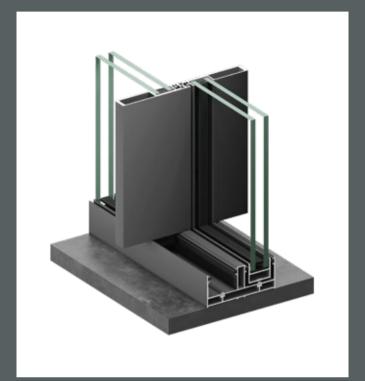

K30M on the floor

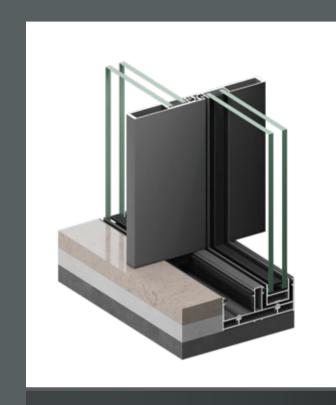

K30M Conceal from Inside





#### **System Specification**

Profile Alloy 6063

Glass Thickness 17.52, 24, 28, 32

Max Shutter Height\*3600Max Shutter Weight300kgMulti LockingYes


Mosquito Mesh Solution Pleated / Roll Up


Hidden Bottom Yes
Corner Opening Yes


Roller Rail Stainless Steel


#### **Section Detail**

Frame Height 50
Frame Width 2 Track 115
Frame Width 3 Track 178
Interlock Sightline 20
Center Opening Profile Width 46















# K30C CASEMENT













#### System Specification

Profile Alloy	6063
Glass Thickness	5, 6
Max Shutter Height*	1800
Max Shutter Width	750
Max Shutter Weight	750kg
Multi Point Locking	Yes
Single Point Locking	Yes
Mosquita Mash Salution	Dlastad / Da


Mosquito Mesh Solution Pleated / Roll Up


Hinges Butt Hinges / Friction Stay Hinges


Top Hung Yes

#### Section Detail

Frame Height	46
Frame Width 2 Track	30
Frame Width 3 Track	70





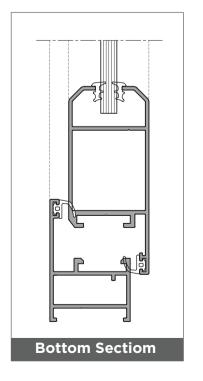






# K50C CASEMENT (WINDOW)



K50C on the floor



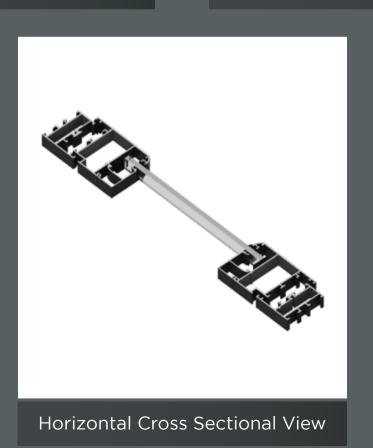



#### System Specification

Profile Alloy 6063

Glass Thickness 6, 8, 10, 11.52, 12, 13.52, 15.52, 17.52, 20, 24, 28, 30

Max Shutter Height\*1800Max Shutter Width800Max Shutter Weight80kgMulti Point LockingYesSingle Point LockingYes


Mosquito Mesh Solution Pleated / Roll Up


Hinges Butt Hinges / Friction Stay Hinges


Top Hung Yes

#### Section Detail

Frame Height 46/73
Frame Width 2 Track 50
Frame Width 3 Track 81/62





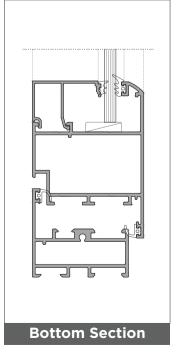






# K50C CASEMENT (DOOR)



K50C on the floor

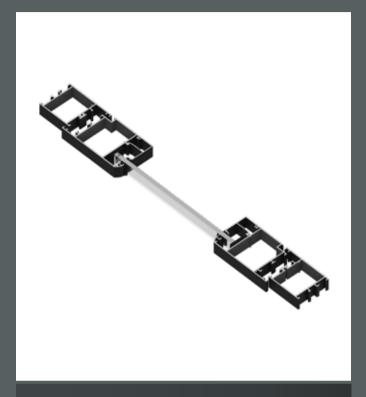

Horizontal Cross Sectional View



#### **System Specification**

Profile Alloy 6063

Glass Thickness 6, 8, 10, 11.52, 12, 13.52, 15.52, 17.52, 20, 24, 28, 30

Max Shutter Height\*3600Max Shutter Width1200Max Shutter Weight180kgMulti Point LockingYesSingle Point LockingYes


Mosquito Mesh Solution Pleated / Roll Up


Hinges Sleek Heavy Duty Butt Hinges


Cylinder With Knob Yes
Concealed Door Closure Yes

#### **Section Detail**


Frame Height (mm) 46/73
Frame Width (mm) 50
Shutter Width (mm) 97
Kick Plate Height (mm) 154









## K25SL Typology

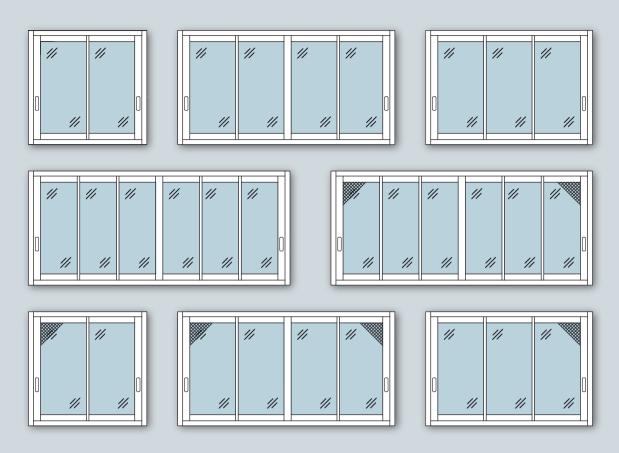


## K30SL Typology

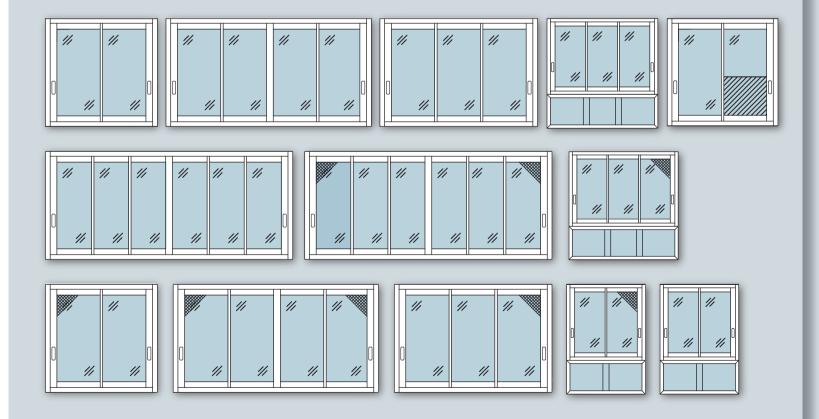


## K39SL Typology

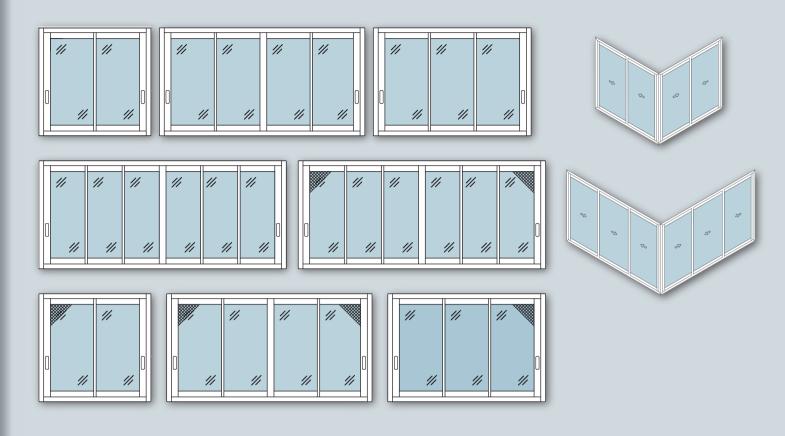


## K30M Minimal Typology

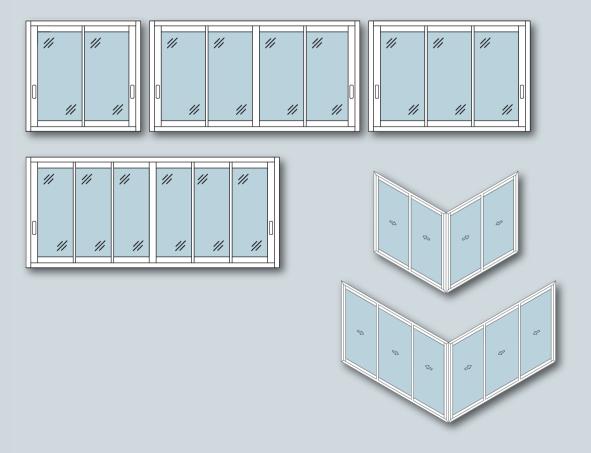


## K30C Casement Typology

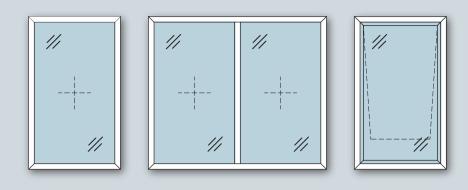

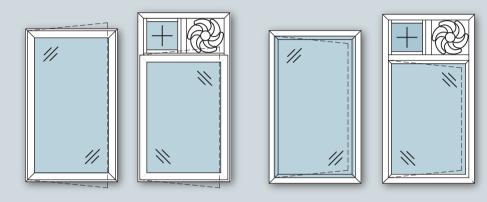

### K50C Casement ( Door ) Typology

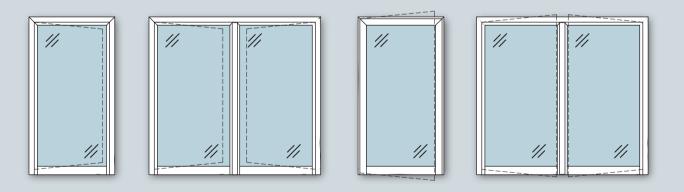

## K50C Casement (Window) Typology

